

# Low Pass Filter

## Features

- high rejection
- sharp insertion loss roll off
- excellent VSWR, 1.2:1 typ.@ passband
- aqueous washable

## Applications

- wireless communications
- receivers / transmitters

## HT-RLP-900+



50Ω DC to 900 MHz

### Low Pass Filter Electrical Specifications

PASSBAND (MHz)  (loss < 2 dB)	f <sub>co</sub> (MHz) Nom.  (loss 3 dB)	STOPBAND (MHz)		VSWR (:1)	
		(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-900	1000	1300-1750	1750-2900	1.2	20

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max.
*Permanent damage may occur if any of these limits are exceeded.	


### Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	$\sigma$			
0.5	0.02	0.00	51.49	1.0	0.64
50.0	0.08	0.00	41.46	50.0	0.65
250.0	0.21	0.01	31.46	100.0	0.65
400.0	0.31	0.01	23.11	150.0	0.66
600.0	0.44	0.01	21.51	200.0	0.68
800.0	0.62	0.02	23.69	300.0	0.68
900.0	0.82	0.02	30.02	350.0	0.71
960.0	1.40	0.08	13.20	400.0	0.73
1000.0	2.94	0.25	6.03	450.0	0.77
1040.0	6.07	0.38	2.71	5000.0	0.80
1100.0	12.23	0.42	1.08	550.0	0.81
1200.0	22.10	0.36	0.54	650.0	0.95
1300.0	30.42	0.35	0.38	700.0	1.01
1400.0	36.91	0.35	0.32	750.0	1.11
1750.0	47.65	0.37	0.26	800.0	1.23
2000.0	48.61	0.31	0.26	850.0	1.35
2500.0	49.49	0.52	0.28	900.0	1.65
2900.0	58.98	3.62	0.33	1000.0	2.39

### Pin Connections

RF IN	2
RF OUT	6
GROUND	1, 3, 4, 5, 7, 8


### Outline Drawing

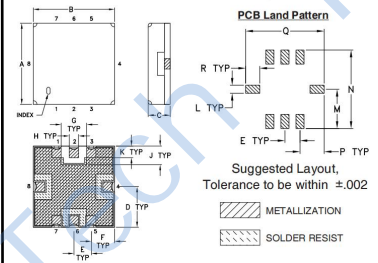



### Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.350	.350	.100	.175	.075	.100	.110	.040	.080
8.89	8.89	2.54	4.45	1.91	2.54	2.79	1.02	2.03
K	L	M	N	P	Q	R		wt.
.050	.040	.195	.390	.120	.390	.070		grams
1.27	1.02	4.95	9.91	3.05	9.91	1.78		0.25

### Suggested PCB Layout

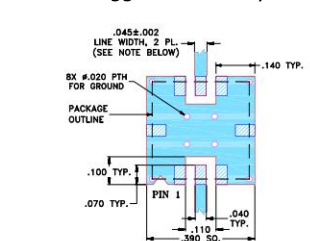

- NOTES:
1. TRACE WIDTH IS SHOWN FOR FRA WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

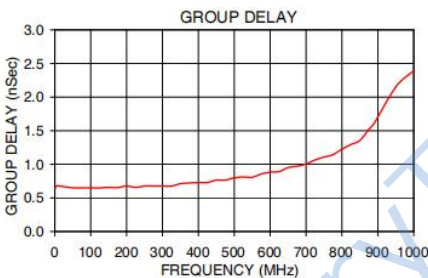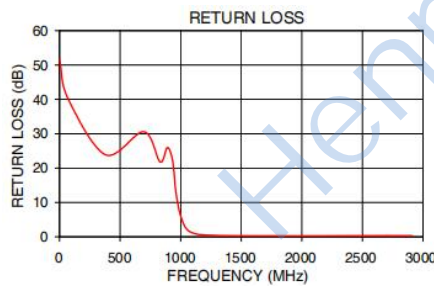

### Functional Schematic

